



Tacoma Facility

1427 E 26th Street

Tacoma, WA 98421

(253) 272-7788




Quincy Facility

1302 NE Intermodal Way

Quincy, WA 98848

(509) 497-0350

SUBMITTAL SHEET — FIBERGLASS ELBOW

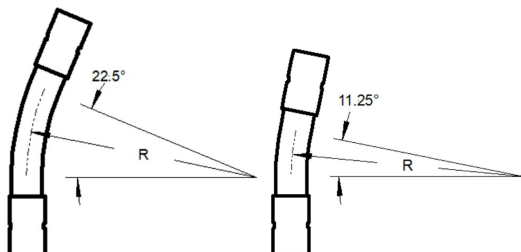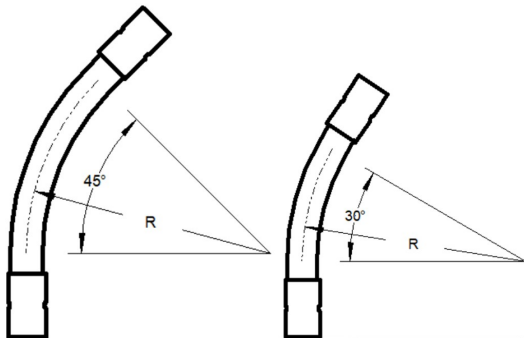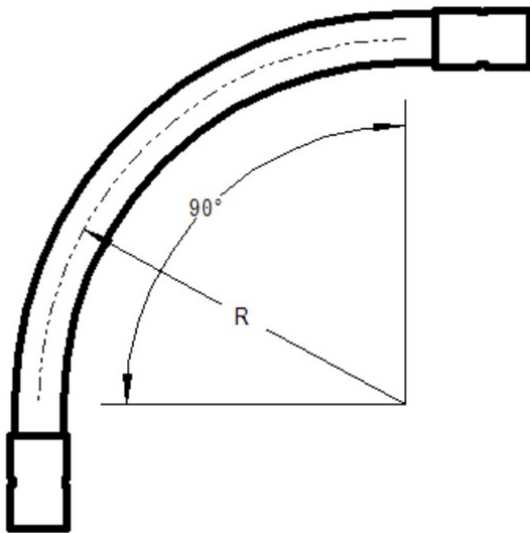

Pipe Size D (inches)	Dimensions (inches)				
	Tangent Length T (min)	Standard Radius R (min)	Bell Entrance A (avg)	Bell Bottom B (avg)	Bell Length C (min)
½	1 ½	4	0.852	0.836	0.652
¾	1 ½	4 ½	1.064	1.046	0.719
1	1 ⅞	5 ¾	1.330	1.310	0.875
1 ¼	2	7 ¼	1.677	1.655	0.938
1 ½	2	8 ¼	1.918	1.894	1.062
2	2	9 ½	2.393	2.369	1.125
2 ½	3	10 ½	2.890	2.868	1.469
3	3 ⅞	13	3.515	3.492	1.594
3 ½	3 ¾	15	4.015	3.992	1.687
4	3 ⅞	16	4.515	4.491	1.750
5	3 ⅞	24	5.593	5.553	1.937
6	3 ¾	30	6.658	6.614	2.125

8" and larger diameters available upon request (non-UL listed)

Advantages & Highlights of Fiberglass Elbows

- Manufactured to UL 2515 specifications for ABOVE GROUND REINFORCED THERMOSETTING RESIN CONDUIT (RTRC) AND FITTINGS
- Come with factory installed PVC couplings or stubs with a spigot end
- Wide ranges of sizes ¾" – 6", available in 11.25°, 22.5°, 30°, 45°, 90°, large radius sweeps available upon request

S40 DSDB
Coupling
Dimensions

