



Tacoma Facility

1427 E 26th Street

Tacoma, WA 98421

(253) 272-7788


Quincy Facility

1302 NE Intermodal Way

Quincy, WA 98848

(509) 497-0350

SUBMITTAL SHEET — PVC ELBOW

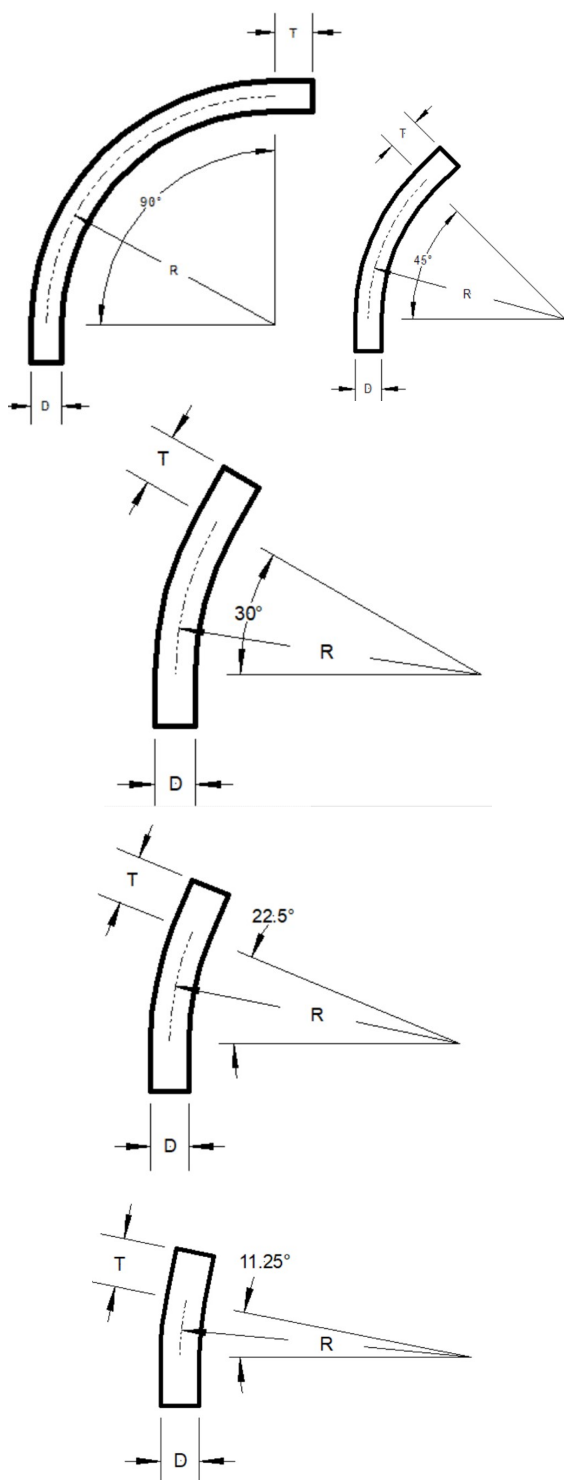

Pipe Size D (inches)	Dimensions (inches)				
	Tangent Length T (min)	Standard Radius R (min)	Bell Entrance A (avg)	Bell Bottom B (avg)	Bell Length C (min)
½	1 ½	4	0.852	0.836	0.652
¾	1 ½	4 ½	1.064	1.046	0.719
1	1 ⅞	5 ¾	1.330	1.310	0.875
1 ¼	2	7 ¼	1.677	1.655	0.938
1 ½	2	8 ¼	1.918	1.894	1.062
2	2	9 ½	2.393	2.369	1.125
2 ½	3	10 ½	2.890	2.868	1.469
3	3 ⅞	13	3.515	3.492	1.594
3 ½	3 ¾	15	4.015	3.992	1.687
4	3 ⅞	16	4.515	4.491	1.750
5	3 ⅞	24	5.593	5.553	1.937
6	3 ¾	30	6.658	6.614	2.125

8" and larger diameters available upon request (non-UL listed)

Advantages & Highlights of PVC Elbows

- Manufactured to UL 651 specifications for SCHEDULE 40, 80, TYPE EB and A RIGID PVC CONDUIT and FITTINGS
- Rigid PCD conduit and fittings covered in these requirements are intended to be joined to each other and to rigid PCD boxes, conduit bodies, and fittings in the field by such means as a push-fit or a cement that is or contains a solvent for PVC.

Integral
Coupling
Dimensions

