



Tacoma Facility

1427 E 26th Street

Tacoma, WA 98421

(253) 272-7788


Quincy Facility

1302 NE Intermodal Way

Quincy, WA 98848

(509) 497-0350

STRAIGHT RUNNING THREADS

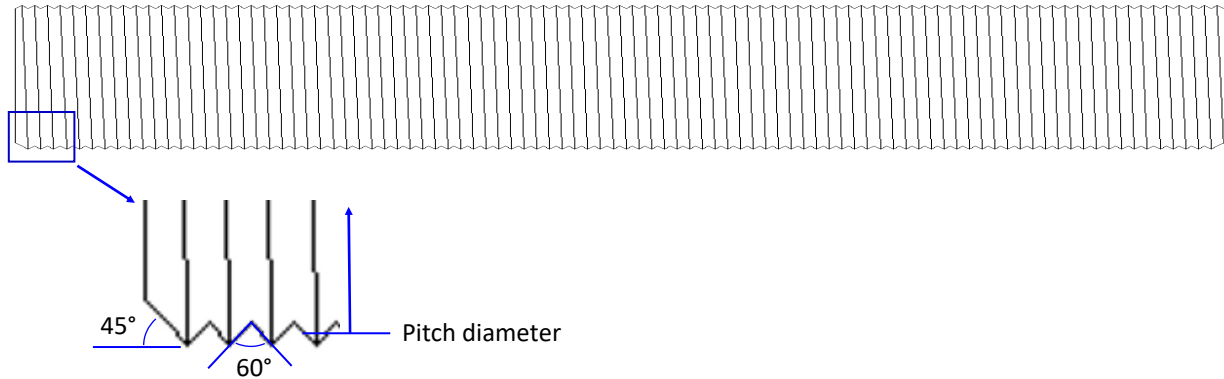

Pipe Size (Inches)	Overall Length OAL (in)	Threads per Inch	Minimum Pitch Diameter (in)	Maximum Pitch Diameter (in)
2	48	11.5	2.748	2.294
3	36	8	3.375	3.385
4	36	8	4.373	4.383

Other sizes available upon request

Advantages & Highlights of Extended TAs:

- Manufactured from Schedule 80 pipe conforming to UL 651 and NEMA TC-2 *Electrical Polyvinyl Chloride (PVC) Conduit*
- Straight External Running Threads meet the requirements of section 3.4 & Table 3 of NEMA TC-3 *Polyvinyl Chloride (PVC) Fittings for Use with Rigid PVC Conduit and Tubing*
- Pipe ends are chamfered to a 45° angle for the first thread for ease of installations
- Dimensions are approximate and subject to normal manufacturing tolerances