






Tacoma Facility

1427 E 26th Street
 Tacoma, WA 98421
 (253) 272-7788

Quincy Facility

1302 NE Intermodal Way
 Quincy, WA 98848
 (509) 497-0350

EXPANSION COUPLINGS

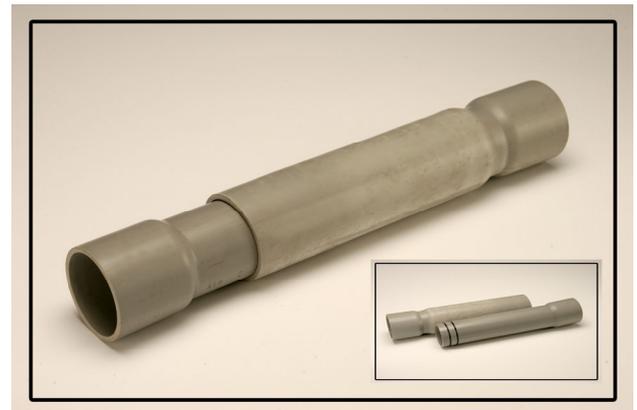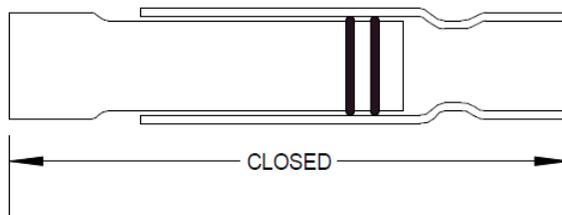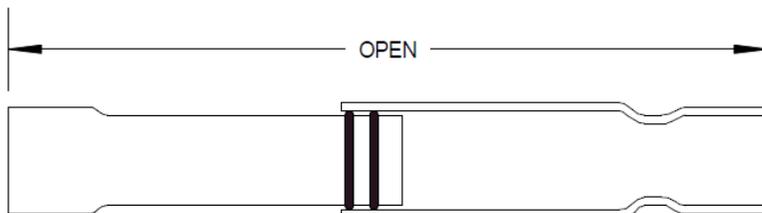

Pipe Size (inches)	Closed Length (in)	Open Length (in)	Weight (lbs)
½	12.0	19.0	0.270
¾	13.0	19.5	0.374
1	14.0	20.0	0.648
1 ¼	14.5	20.5	0.912
1 ½	15.0	21.0	1.127
2	16.0	24.5	1.647
2 ½	17.0	25.0	2.716
3	18.0	25.5	4.002
3 ½	19.0	27.5	5.146
4	20.0	28.5	6.304
5	22.0	29.0	8.811
6	23.5	29.5	11.764

All dimensions are inches

Advantages & Highlights of Expansion Couplings

- Manufactured from Schedule 40 or 80 pipe conforming to UL 651 and NEMA TC-2 *Electrical Polyvinyl Chloride (PVC) Conduit*
- Compression formed interference fit conforms to UL651 and NEMA TC-3 *Polyvinyl Chloride (PVC) Fittings for Use with Rigid PVC Conduit and Tubing*
- Couplings are intended to be joined with a cement that is or contains a solvent for polyvinyl chloride
- 6" travel minimum travel distance
- Made with 2 buna rubber O-rings separated by 7/16" - 1/2" and lubricated with Way Oil Vistac 68
- Dimensions are approximate and subject to normal manufacturing tolerances